


BAADER 1406
Turkey Carcass Washer



- Available models: 12" OC, 18" OC, or a combination of 12" and 18" OC.
- Handles turkeys up to 60 lbs.
- Water volume on inside and outside sprays can be separately controlled.
- Quick disconnect inner spray probes
- Outside spray bar system can swing up to prevent hang-ups.
- Cycle includes 3-second dwell time for bird cavity drainage.
- Full cabinet enclosure prevents overspray with idler included in cabinet.

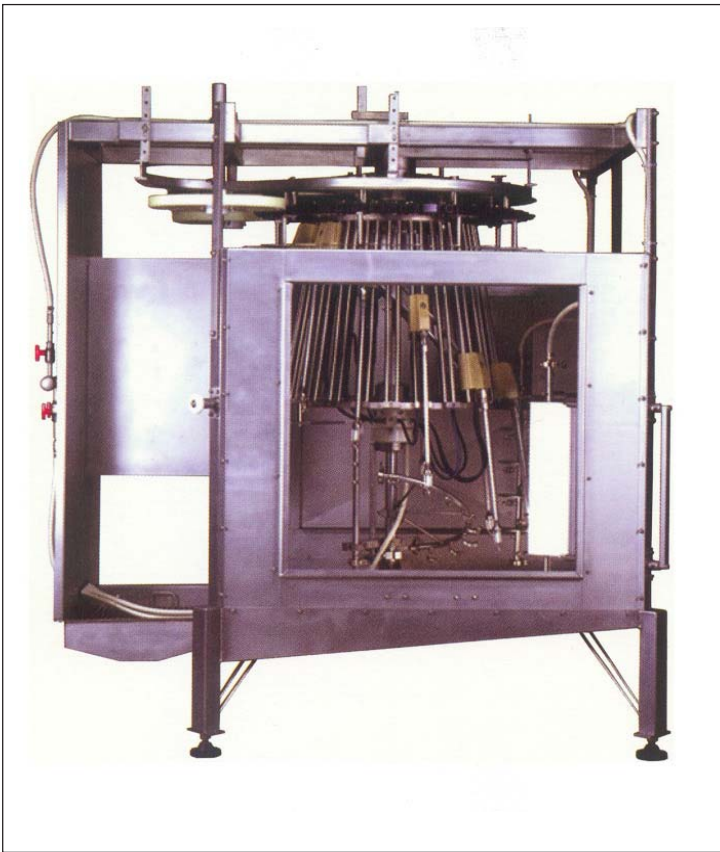

BAADER 1406 Turkey Carcass Washer

• Technical Data

Operating Range All Sizes

Note: The indicated limits of the working ranges may vary as a function of the proportion, quality and nutritional condition of the bird. In order to achieve an optimal result, the machine should be adjusted within its working range to the bird size principally processed.

Capacity Up to 70 bpm (4,200 bph)

Note: All others subject to approval by Baader-Johnson

Machine Options

Up to 60 BPM 12" On Center

Up to 40 BPM 18" On Center

Weights, Dimensions and Volume

| | | | |
|-------------------------|---|---------------------|-------------------|
| <i>Machine Weight:</i> | | 3000 Lb | 1350 Kg |
| <i>Shipping Weight:</i> | | 3300 Lb | 1500 Kg |
| <i>Shipping Dims:</i> | L | 96" | 2438 mm |
| | W | 79" | 2007 mm |
| | H | 107" | 2718 mm |
| <i>Shipping Volume:</i> | | 470 ft ³ | 13 m ³ |

Water

| | | | |
|----------------------------|------|---------|-----------|
| <i>Process Water Reqs:</i> | V | 48 GPM | 182 L/min |
| | | 57 GPM | 216 L/min |
| | | 65 GPM | 246 L/min |
| P | | 60 PSI | 4 bar |
| | | 80 PSI | 6 bar |
| | | 100 PSI | 7 bar |
| T | 60°F | 16°C | |

Process Water Connection: 1-1/2" FNPT 1-1/2" FNPT

Electrical

Std. Electrical Reqs: V 220 V 220 V

Note: All others subject to approval by Baader-Johnson

Mechanical

Torque Requirements: 200 ft lb 275 Nm

Shackle Length: Min 26" 661 mm
Max 34" 864 mm

Track Height Min: Min 84" 2134 mm
Max 115" 2921 mm

Shackle Types: Plastic BJ rigid shackle
Plastic & Stainless BJ 2-piece

Note: All others subject to approval by Baader-Johnson

Note: All rigid shackles to be mounted with neutral clips or clips pointing away from the machine.


Track Types: T-rail (50mm)
I-Beam (3")
Round Pipe Sch 80 42 x 5mm

Note: All others subject to approval by Baader-Johnson

Chain Types: Log chain (1")
Log chain (1-1/2")
X 348

Note: All others subject to approval by Baader-Johnson

Note: Chain stretch not to exceed 4%

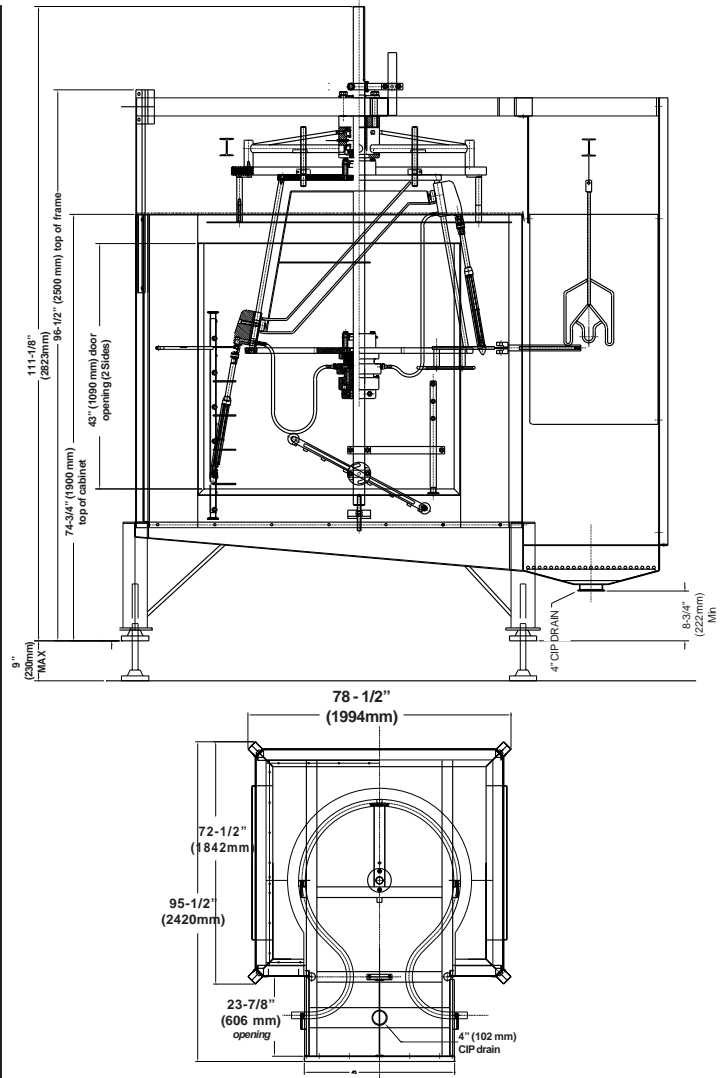

Illustrations and dimensions are approximate and not binding. Subject to design changes in the interest of technical progress. Actual scope of supply is specified in our quotations and order confirmations and may differ from descriptions and photos in this leaflet.

Attention!

For the illustration of technical details the safety devices and protection mechanisms are partly not shown in operative condition. When operating the machine, all corresponding devices and instructions referring to the safety of the machine must be utilized and/or observed. (Protective panels and safety guards removed for photograph)



Johnson Food Equipment, Inc.
Member of the BAADER Group
2955 Fairfax Trafficway Kansas City, KS 66115
Tel: 913-621-3366 Fax: 913-621-1729
Email: sales@baader-johnson.com
Web Site: www.baader-johnson.com
800-288-3434 U.S. & Canada